

PETERMANN-TECHNIK GmbH Lechwiesenstr. 13 • D-86899 • Landsberg am Lech Tel: +49/8191/305395 • Fax: +49/8191/305397 info@petermann-technik.com • www.petermann-technik.com



SMD WATCH CRYSTAL 32.768 kHz

SERIES "M1610 32.768 KHZ ±10 PPM 7PF (-40/+85°C)"

FEATURES

- + Excellent shock-resistance, robust ceramic package with metal lid
- + Ultra low profile
- + Standard operating temperature range of -40/+85°C
- + Excellent clock generator for CPU's, Wireless, Mobile Comm., etc.



GENERAL DATA

| PARAMETERS | PRODUCT FEATURES AND CONDITIONS |
|-----------------------------|--|
| SMD-CRYSTAL SERIES | M1610 |
| NUMBER OF SOLDER PADS | 2 |
| FREQUENCY | 32.768 kHz |
| FREQUENCY TOLERANCE AT 25°C | ±10 ppm |
| LOAD CAPACITANCE (CL) | 7 pF |
| WORKING TEMPERATURE RANGE | -40/+85°C |
| SERIES RESISTANCE | 90 kΩ max. |
| SHUNT CAPACITANCE (Co) | 1.3 pF typ. |
| TURNOVER TEMPERATURE | +25°C ±5°C |
| TEMPERATURE COEFFICIENT | -0.03±0.01 ppm/°C ² |
| DRIVE LEVEL | 0.1 μW±0.01 μW (0.5 μW max.) |
| AGING | ± 3 ppm first year, ± 5 ppm / 5 years and ± 10 ppm / 10 years max. |
| INSULATION RESISTANCE | >500 MΩ DC/100V ±10% |
| STORAGE TEMPERATURE | -40°/+85°C |
| DELIVERY FORM | Tape and Reel (5.000 pcs per reel, other quantities on request as cut off tape or bulks) |
| RoHS | Lead free and RoHS compliant |
| MARKING | Axxxx (A = model code, xxxx = date code) |
| Ordering Code | M1610 32.768 kHz ±10 ppm 7pF (-40/+85°C) |
| Customer P/N | |
| PETERMANN-TECHNIK P/N | QEU10010076 |

Notes

- 1. The reference temperature for all specified values and tests is +25°C.
- 2. No Ultrasonic Cleaning: Do not subject the M1610 to an ultrasonic cleaning environment. Permanent damage or long term reliability issues to the structure may occur.
- 3. Do not design any ground line under the M1610.
- 4. Do not solder with hot air gun.




PETERMANN-TECHNIK GmbH Lechwiesenstr. 13 • D-86899 • Landsberg am Lech Tel: +49/8191/305395 • Fax: +49/8191/305397 info@petermann-technik.com • www.petermann-technik.com




DIMENSIONS AND PATTERNS

PACKAGE SIZE – DIMENSIONS (UNIT:MM) 1.6 X 1.0 X 0.5 MM

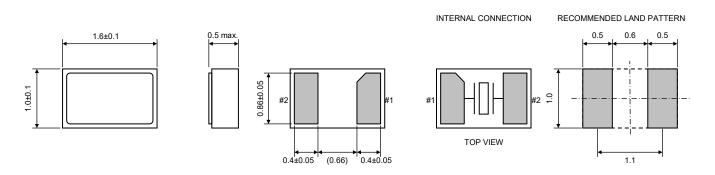

REFLOW SOLDER PROFILE

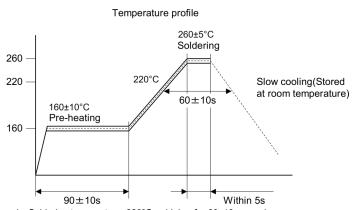

Peak temperature: 260±5°C for within 5 seconds. Soldering temperature: 220°C or higher for 60±10 seconds. Pre-heating temperature: 160±10°C for 90±10 seconds. Quartz crystal units which is put on PCB shall be through reflow soldering furnace twice with the condition shown above.



PREMIUM QUALITY BY PETERMANN-TECHNIK



OUR COMPANY IS CERTIFIED ACCORDING TO ISO 9001:2015 AND 14001:2015

THIS IS FOR YOU TO ENSURE THAT THE PRINCIPLES OF QUALITY MANAGEMENT ARE FULLY IMPLEMENTED IN OUR QM-SYSTEM AND QUALITY CONTROL METHODS.